

# External Solid Wall Lintels - CN71A

Exterior solid wall lintels

## Benefits

**Duplex Corrosion Protection System**  
Ensures optimum durability and longevity




### Box profile

- Resists twisting during construction

### Instant full load use

Box profile is designed to carry full load of wet masonry as soon as it is installed

**Note:** CN71 and CN81 lintels can also be used as heavy duty wall eaves lintels for 70mm to 100mm cavities.

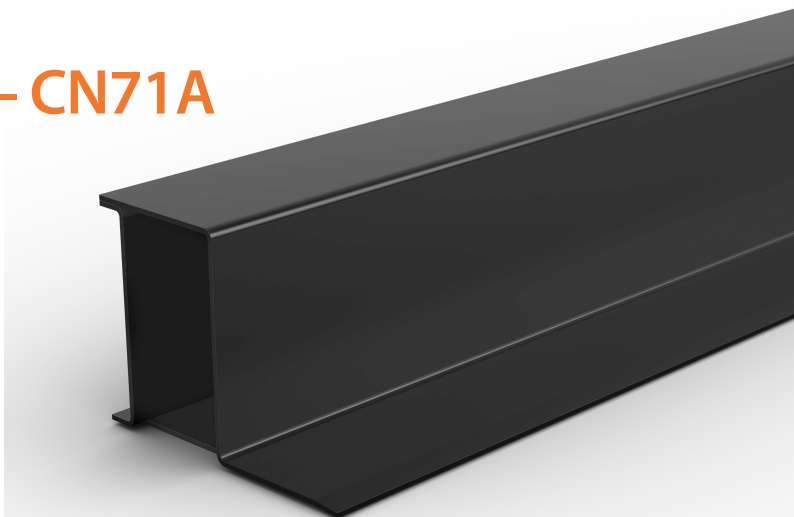


## 200mm and 215mm Exterior Solid Walls

### Standard Duty



Standard lengths are available in 150mm increments.



### CN71A

Standard lengths (mm)	900-1500	1650-2100	2250-2700
SWL (kN)	29	27	20
Weight (kg/m)	9.3	9.3	9.3
Nominal height 'h' (mm)	143	143	143

The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.