A35E

Framing Anchors



The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.

• Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.

Features

Material

• Pre-galvanised mild steel.

Benefits

- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35 to be used for a wide variety of connections.


Applications

Suitable On

• Wood to wood applications.

Domaines d'utilisation

.

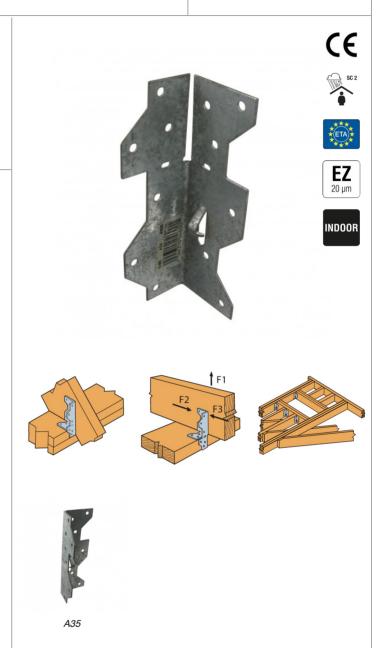

A35E

Framing Anchors



Technical Data





Product Dimensions

References		Product	Dimensions [mm]	Holes					
	Λ.	D	C		Flange A	Flange B			
	^	В	0		Ø3,8	Ø3,8			
A35E	33	33	114	1.2	6	6			

Connection Type 2



References	Fasteners		Installation	Characteristic Capacities - Timber C24 ⁽³⁾ [kN]	Safe Working Loads - Timber C16 [kN]											
	Flange A	Flange B		R _{2,k}			Long	Term			Medium Term					
	N3.75x30	N3.75x30			R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R _{6,SWL}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R
A35E (Install 2)	6	6	2	-	1.3	1.3	-	1.5	-	-	1.3	1.3	-	1.7	-	

Connection Type 3



References	Fasteners		Installation	Characteristic Capacities - Timber C24 ⁽³⁾ [kN]	Safe Working Loads - Timber C16 [kN]											
	Flange A	Flange B		D		Long Term Medium Term										
	N3.75x30	N3.75x30		R _{2,k}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R _{6,SWL}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R
A35E (Install 3)	6	3	3	5.3	-	1	-	-	0.6	1	-	1.1	-	-	0.7	

(3) Based upon 2 No brackets installed diagonally opposite to each other

A35E

Framing Anchors



Connection Type 4



References	Fasteners		Installation	Characteristic Capacities - Timber C24 ⁽³⁾ [kN]		Safe Working Loads - Timber C16 [kN]											
	Flange A	Flange B		D		Long Term Medium Term											
	N3.75x30	N3.75x30		R _{2,k}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R _{6,SWL}	R _{1,SWL}	R _{2,SWL}	R _{3,SWL}	R _{4,SWL}	R _{5,SWL}	R	
A35E (Install 4)	6	6	4	5.3	-	1	1	0.6	-	-	-	1.1	1.1	0.7	-		

(3) Based upon 2 No brackets installed diagonally opposite to each other

A35E

Framing Anchors



Installation

Fixing

Install with 3.75X30mm square twist nails.

Installation

Use all specified fasteners



